



Cisco

642-736

*Implementing Advanced Cisco Unified Wireless Security
(IAUWS)*

Dynamic VLAN assignment can be done on a Cisco Wireless LAN Controller using which two attributes? (Choose two.)

- A. TACACS+ attributes
- B. RADIUS IETF attributes
- C. Cisco Airespace VSA
- D. RADIUS Cisco Aironet

Answer: B, C

QUESTION: 72

The basic EAP protocol consists of which packet types?

- A. EAP pass-thru, EAPOL
- B. EAP failure, EAP success
- C. EAP acknowledge, EAP success
- D. EAP request, EAP response, EAP success, EAP failure

Answer: D

QUESTION: 73

The Cisco Unified wireless solution provides which three wired-side tracing techniques? (Choose three.)

- A. Switch port tracing
- B. Adaptive wIPS
- C. RLDP
- D. Auto Containment
- E. Rogue Detector
- F. H-REAP

Answer: A, C, E

QUESTION: 74

Where do the guest WLANs have to be configured when using the foreign and anchor controller approach?

- A. Anchor controllers only
- B. Both foreign and anchor controllers

- C. Every controller in the mobility group
- D. Foreign controllers only that manage AP with guest access

Answer: B

QUESTION: 75

When deploying guest WLAN access using the anchor controller, the foreign controller initiates the EoIP tunnel to the anchor controller through which interface?

- A. Any interface
- B. Ap-manager interface
- C. Management interface
- D. Virtual interface

Answer: C

QUESTION: 76

What is necessary for web authentication in a Cisco Wireless LAN Controller?


- A. Layer 2 security feature
- B. Layer 3 security feature
- C. WPA
- D. WPA2 enabled
- E. 802.1x authentication enabled

Answer: B

QUESTION: 77

Refer to the exhibit.

This topology diagram is for wireless NAC out-of-band operations. When configuring the interface on the controller to support the NAC-enabled WLAN, which VLAN is the quarantine VLAN and which VLAN is the access VLAN?

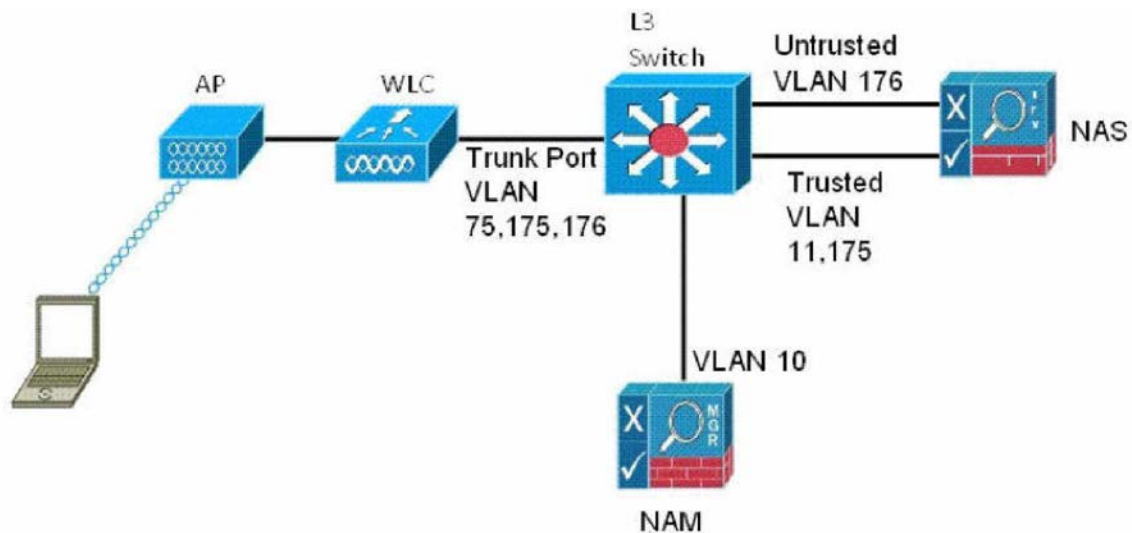

- A. VLAN 176 is the quarantine VLAN and VLAN 175 is the access VLAN.
- B. VLAN 176 is the quarantine VLAN and VLAN 11 is the access VLAN.
- C. VLAN 175 is the quarantine VLAN and VLAN 176 is the access VLAN.
- D. VLAN 175 is the quarantine VLAN and VLAN 11 is the access VLAN.
- E. VLAN 75 is the quarantine VLAN and VLAN 175 is the access VLAN.
- F. VLAN 75 is the quarantine VLAN and VLAN 176 is the access VLAN.

Answer: A

QUESTION: 78

If DHCP services are implemented on the anchor controller, what is locally populated in the primary DHCP server field?

- A. DHCP relay IP address
- B. Next-hop router IP address
- C. Firewall DMZ interface IP address
- D. Management IP address of the controller

Answer: D

QUESTION: 79

How does Cisco implement infrastructure MFP?

- A. Encrypting the management frames sent between APs and Cisco Compatible Extensions v5 clients
- B. Using a digital signature mechanism to insert a MIC into 802.11 management frames
- C. Using a secured EoIP management tunnel between the APs and controllers
- D. Using AES to encrypt all management frames between the clients, aps, and controllers
- E. Using 802.1X to authentication the APs

Answer: B

QUESTION: 80

What is the Cisco NAC Guest Server account management used for?

- A. To deploy external guest management for billing purposes
- B. To allow guests to roam across controllers
- C. To allow lobby ambassadors to manage more than 2,000 guest users
- D. To have more than one lobby administrator
- E. To allow web authentication via external portal

Answer: A

QUESTION: 81

Which two options are valid for configuring a controller IDS signature rule? (Choose two.)

- A. Quiet time
- B. Mac frequency
- C. Source address
- D. Destination address
- E. Frequency band

Answer: A, B

QUESTION: 82

Which two descriptions of mpings and epings are true? (Choose two.)

- A. mpings run over UDP port 16666.
- B. mpings run over UDP port 16667 and epings run over port 16666.
- C. epings run over EoIP.
- D. mpings test mobility data packet reachability and epings test mobility control packet reachability.

- E. mpings run over the management interface and epings run over the virtual interface.
- F. mpings and epings are useful tools for troubleshooting the lightweight APs.

Answer: A, C

QUESTION: 83

Which three 802.1x Authentication Modes can be configured with Cisco Secure Services Client supplicant? (Choose three.)

- A. EAP-FAST
- B. EAP-TLS
- C. EAP-TTLS
- D. LEAP-GTC
- E. PEAP-TLS

Answer: A, B, C

QUESTION: 84

Which two steps are required for creating a wired guest user? (Choose two.)

- A. Create WLAN on the anchor controller only.
- B. Select the management interface as the egress interface.
- C. Create the management interface in the egress interface.
- D. Select the interface you created as the guest LAN interface in the ingress interface menu.

Answer: B, D

QUESTION: 85

When using Cisco Secure Services Client to configure a wireless LAN connection that uses EAP- FAST, which three options are available as the inner authentication method? (Choose three.)

- A. GTC
- B. PAC
- C. MSChapV2
- D. TLS
- E. PAP
- F. Pre-shared key

Answer: A, C, D

Download Full Version From <https://www.certkillers.net>



DON'T KNOW
OR NO PREFERENCE

Pass your exam at First Attempt....Guaranteed!